

# SINGLE-LOAD TOP-LOAD MATCHING DRYERS – 50 Hz

## MDE20 AND MDG20



### TURBOVENT® SYSTEM\*

- A high-speed blower wheel optimizes performance in long vents
- High airflow helps reduce drying times for a wide variety of loads
- Helps to increase efficiency and turns over the life of the machine



### CONTROLS TO MEET YOUR NEEDS

- *Mechanical controls* provide a simple user interface with robust, easy-to-use knobs. (MDE/G20CS and MDE/G20MN)
- Get flexibility and individual cycle pricing options for optimal earnings through *Intelligent Controls with M-Series Technology*, while end users can easily choose their preferred wash experience with one-touch cycle selection. (MDE/G20PD and MDE/G20PR)



### LARGE CAPACITY

- 7.4 cu. ft. capacity dryer helps allow for large loads to be dried efficiently and effectively
- Delivers an optimal drying experience for users and helps maximize productivity



### BUILT TO LAST

- Porcelain enamel top — a durable finish that stands up to the demands of high-traffic
- Full wrap console — designed to help protect the internal components
- Front-panel accessibility — provides fast entry to internal components for streamlined self-service
- Extra-large reversible door — provides users unhindered access while loading and unloading



**COIN DROP EQUIPPED**  
MDE20PDAGW pictured  
(Also available in Gas)



**CARD READER READY**  
MDE20PNAGW pictured  
(Also available in Gas)



**COIN SLIDE READY**  
MDE20CSAGW pictured  
(Also available in Gas)



**NON-VEND**  
MDE20MNAGW pictured  
(Also available in Gas)



**AMERICA**  
AN AMERICAN COMPANY FOR OVER 100 YEARS

VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.


®/™ © 2020 Maytag. All rights reserved.  
MY200055 12/20

# SINGLE-LOAD TOP-LOAD MATCHING DRYERS – 50 Hz


## MDE20 AND MDG20



### SIDE VIEW

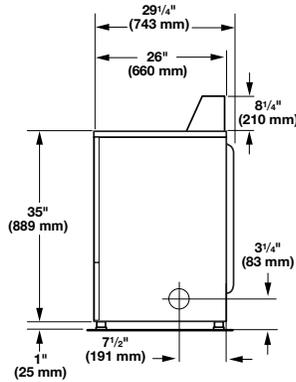

### BACK VIEW

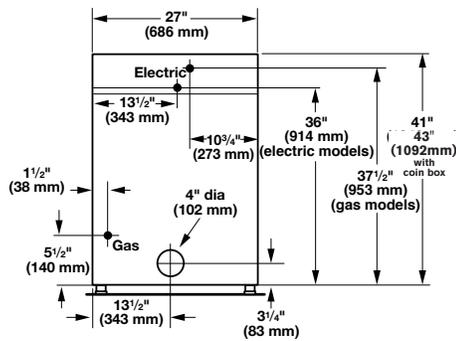

### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

| Number Of 90° Turns | Rigid Metal Vent            |                   |
|---------------------|-----------------------------|-------------------|
|                     | Box Hood and Louvered Style | Angled Hood Style |
| 0                   | 64 ft. (19.5 m)             | 58 ft. (17.7 m)   |
| 1                   | 54 ft. (16.5 m)             | 48 ft. (14.6 m)   |
| 2                   | 44 ft. (13.4 m)             | 38 ft. (11.6 m)   |
| 3                   | 35 ft. (10.7 m)             | 29 ft. (8.8 m)    |
| 4                   | 27 ft. (8.2 m)              | 21 ft. (6.4 m)    |



\*Includes height of metercase for coin drop and coin slide models  
 \*\*Use 4" (101.6 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal, or combustible duct.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

| MODELS<br>COIN DROP/COIN SLIDE/CARD READER READY<br>NON-VEND | MDE20 (PD/CS/PR)<br>MDE20 (MN) | MDG20 (PD/CS/PR)<br>MDG20 (MN) |
|--|--------------------------------|--------------------------------|
| <b>FUEL TYPE</b>   | <b>ELECTRIC</b>                | <b>GAS</b>                     |
| <b>CAPACITY</b>  |                                |                                |
| Cylinder Volume — cu. ft. (liters)                           | 7.4 (210)                      | 7.4 (210)                      |
| Cylinder Diameter — in. (mm)                                 | 26.26 (667)                    | 26.26 (667)                    |
| Cylinder Depth — in. (mm)                                    | 23.2 (590)                     | 23.2 (590)                     |
| <b>DIMENSIONS</b>  |                                |                                |
| Width — in. (mm)   | 27 (686)                       | 27 (686)                       |
| Depth — in. (mm)   | 29.25 (743)                    | 29.25 (743)                    |
| Height — in. (mm)  | 43 (1,092)*                    | 43 (1,092)*                    |
| Door Opening — in. (mm)                                      | 20.25 (514)                    | 20.25 (514)                    |
| Exhaust Duct Diameter — in. (mm)                             | 4 (101.6)**                    | 4 (101.6)**                    |
| <b>CRATED DIMENSIONS</b>                                     |                                |                                |
| Crated Width — in. (mm)                                      | 28.8 (731)                     | 28.8 (731)                     |
| Crated Depth — in. (mm)                                      | 30.8 (782)                     | 30.8 (782)                     |
| Crated Height — in. (mm)                                     | 44.65 (1,134)                  | 44.65 (1,134)                  |
| <b>APPROXIMATE WEIGHT</b>                                    |                                |                                |
| Uncrated — lb (kg)<br>Coin Drop & Coin Slide Models          | 125 (56.7)                     | 142 (64.4)                     |
| Uncrated — lb (kg)<br>Card Ready & Non-Vend Models           | 115 (52.2)                     | 127 (57.6)                     |
| Crated — lb (kg)<br>Coin Drop & Coin Slide Models            | 135 (61.2)                     | 152 (68.9)                     |
| Crated — lb (kg)<br>Card Ready & Non-Vend Models             | 125 (56.7)                     | 137 (62.1)                     |
| <b>ELECTRICAL REQUIREMENTS</b>                               |                                |                                |
| Voltage  | 220-240V                       | 220-240V                       |
| Breaker/Fuse — amps  | 25                             | 10                             |
| Airflow — CFM (CMM)  | 215 (6.10)                     | 230 (6.50)                     |
| Electric Heating Element (watts)                             | 4,600                          | N/A                            |
| Gas Rating — BTU/hr (kcal/hr)                                | N/A                            | 20,000 (5,040)                 |
| Gas Inlet Size — in.   | N/A                            | 3/8 N.P.T.                     |
| Motor Size — HP (kW)   | 1/3 (.25)                      | 1/3 (.25)                      |