



DOMINATOR PLUS

E3913i Induction Range

Key features

- 4 x 3.5kW energy efficient heat zones
 - Instant heat and incredibly fast heat up times
- In-built pan detection
 - No heat generated until a pan is placed on the hob, meaning no wasted energy
- Heavy duty ceramic glass hob
 - Robust and spillages simply wipe clean, no scrubbing required
- Temperature is precisely controllable
 - Change from gentle simmer to rolling boil almost instantly
- Low cooking surface temperature and no naked flames
 - Safer for kitchen staff as reduced risk of burns
- Very little heat emitted into kitchen
 - Contributes to a more pleasant working environment and existing ventilation doesn't have to work as hard
- 1/1 GN fan-assisted oven
 - 5 shelf positions with 2 shelves supplied
- Wide oven temperature range of 100 - 250°C
 - Ideal to prepare a wide variety of food
- Twin oven doors with glass panels
 - Monitor cooking progress without losing heat


Accessories

- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit



Similar Models

- E3914i 4 x 5kW induction range
- E3903i 4 x 3.5kW induction boiling top
- i91104 4 x 3.5kW induction range (GP oven)
- i91104C 4 x 3.5kW induction range (fan-assisted oven)

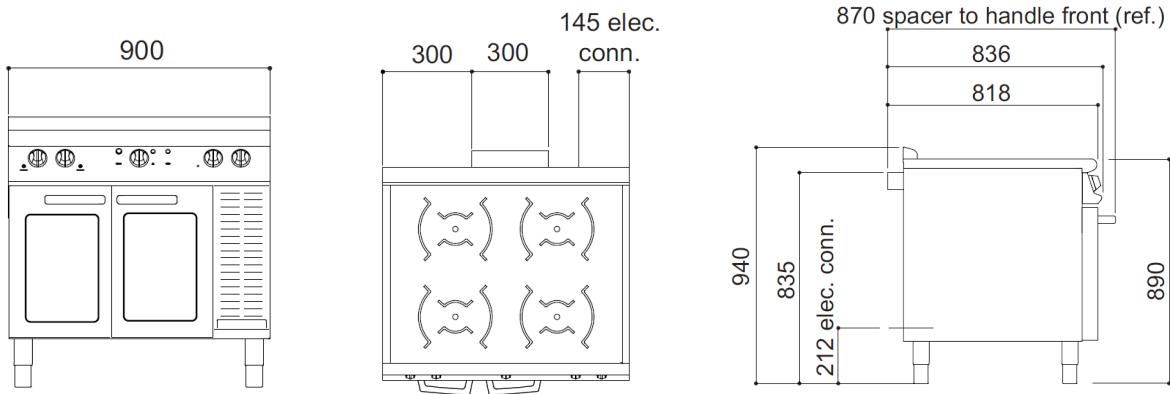

Unit on castors is the same hob height

Measurements *in mm*

Specification details

Electrical rating (kW)	20	
Electrical supply voltage	400V 3N~	
Required electrical supply (A)	32	
Electrical current split (A)	L1: 29 L2: 29 L3: 29	
Element rating - hob (kW)	3.5 x 4	
Element rating - oven (kW)	6	
Heat zone diameter (mm)	270	
Minimum pan size (mm)	120	
Oven dimensions (w x d x h - mm)	530 x 535 x 380	
Oven shelf (w x d - mm)	530 x 535	
Gastronorm compatibility	1/1	
Weight (kg)	140	
Packed weight (kg)	155	
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100	
GTIN numbers	On feet	On castors
	5056466900908	5056466900915

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

