



DOMINATOR**PLUS**

G3860F Single Pan Fryer with Filtration

Key features

- Energy efficient, high performance burner
 - Quick heat up and recovery times
- Automatic two-stage filtration built in
 - Increases oil longevity and maintains quality
- Stainless steel hob with mild steel pan
 - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
 - Variable, precise control
- Sediment collection zone
 - Keeps all cleaner for longer
- Piezo ignition
 - Simple, trouble-free operation
- Fast-acting safety thermostat
 - Power cut to unit if oil overheats
- Supplied with fish grid, basket and lid
 - Everything you need to start frying

Accessories

- Sidescreens
- Factory fitted, adjustable castors
- Fixed installation kit



Similar Models

- G3840F Single pan, twin basket fryer with filtration
- G3860 Single pan, twin basket fryer
- G3865F Twin pan fryer with filtration
- E3860F Single pan, twin basket electric fryer with filtration



Please note this fryer does not have a fat melt cycle

Single Pan, Twin Basket Fryer with Filtration

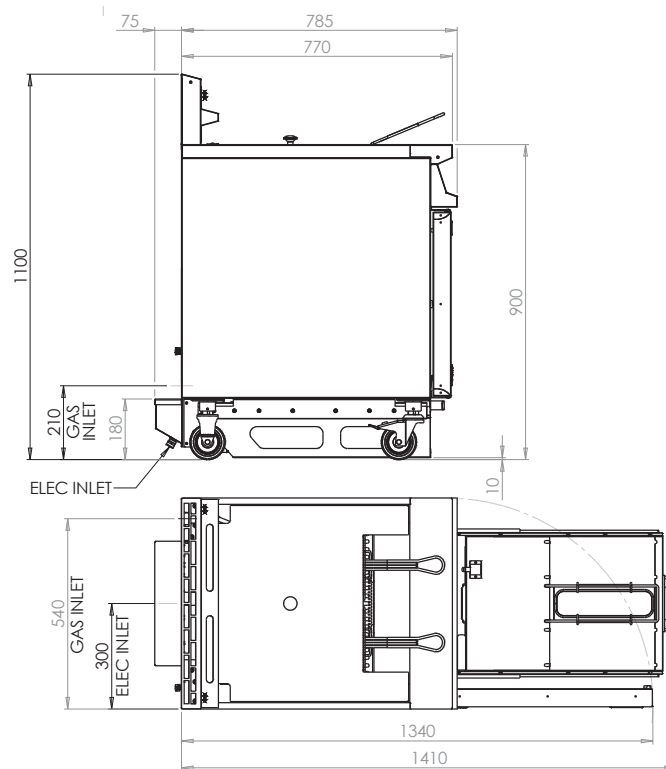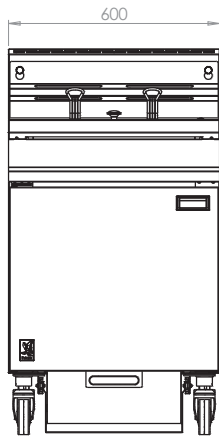

GAS INLET: 3/4" BSP

Measurements *in mm*

Specification *details*

Total rating (natural and propane - kW - Nett)	30	
Total rating (natural and propane - btu/hr - gross)	112,600	
Inlet size (natural and propane)	3/4" BSP	
Electrical supply voltage	230V~	
Flow rate - natural (m ³ /hr)	3.14	
Flow rate - propane (kg/hr)	2.22	
Inlet pressure (natural and propane - mbar)	20 / 37	
Operating pressure (natural and propane - mbar)	11.2 / 34.5	
Oil capacity (litres)	24	
Hourly chip output (kg)	54	
Weight (kg)	100	
Packed weight (kg)	107	
Packed dimensions (w x d x h - mm)	650 x 1000 x 1300	
GTIN numbers	Nat Gas	LPG
	5056466902193	5056466902209

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

