

UNDERCOUNTER GLASSWASHERS  
GX SERIES






HOBART UK,  
SOUTHGATE WAY,  
ORTON SOUTHGATE,  
PETERBOROUGH.  
PE2 6GN  
0844 888 7777

www.hobartuk.com

Undercounter Glasswasher with Reverse Osmosis Unit

GXCROIW-11B

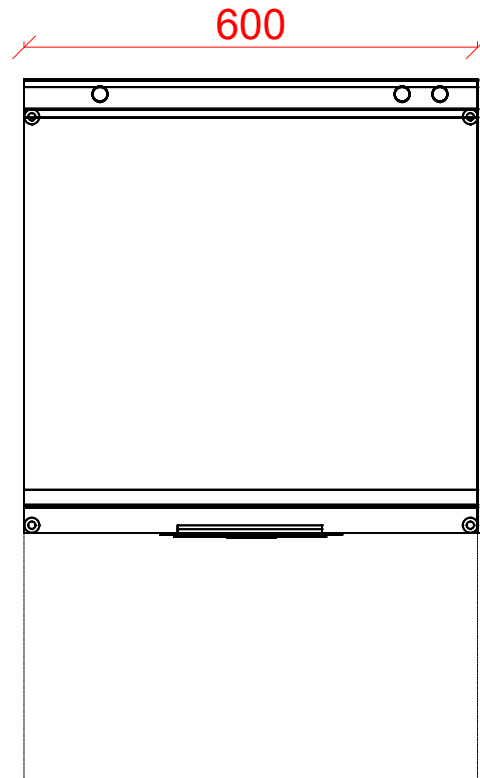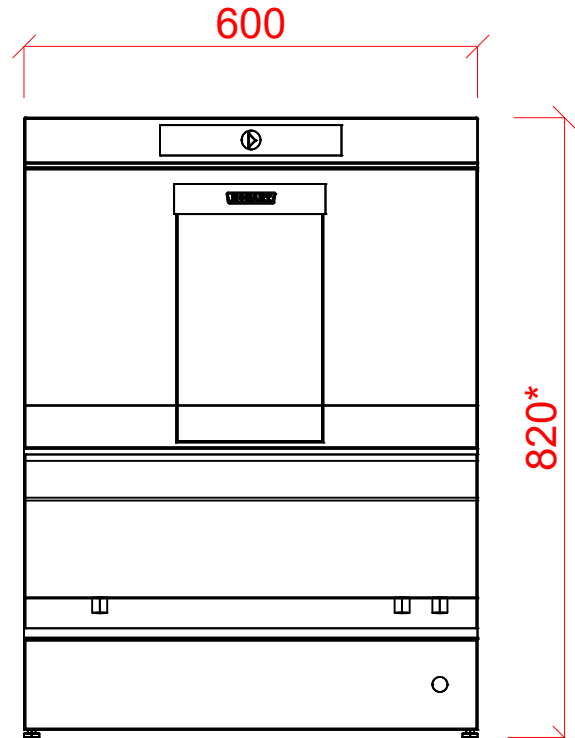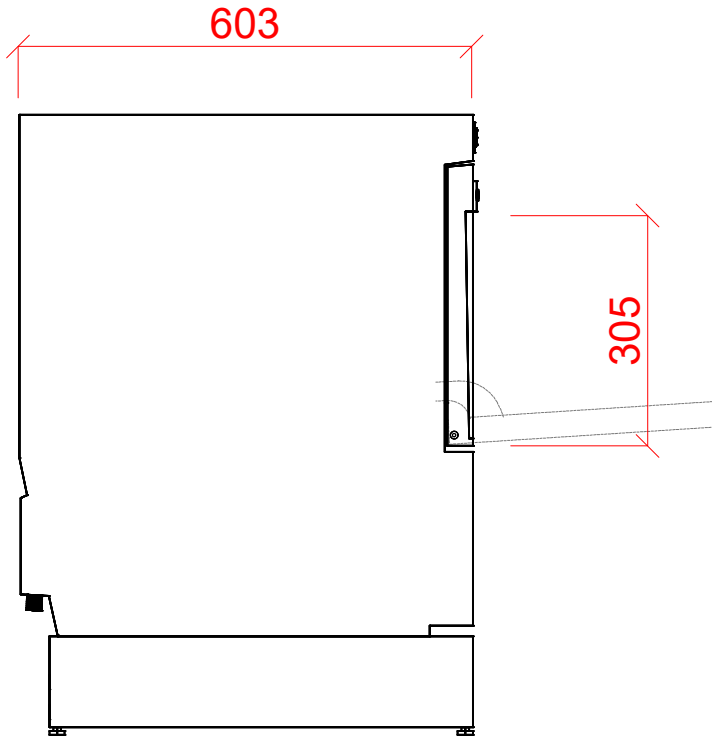

**1** Water

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.

WATER SUPPLY 10°C TO 60°C. 0°-12° CLARK MAX. @ 1.0 TO 6.0 BAR MAX. INITIAL TANK FILL 10.8 LITRES.

RINSE WATER USAGE 2.0 LITRES PER CYCLE. MAX USAGE 120 LITRES PER HOUR.

OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.

**2** Drain

DRAIN - 2.0 METRE FLEXIBLE HOSE TO A 40mm TRAPPED STANDPIPE 800mm MAX A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

**Other Services**

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.  
DETERGENT HOSE - 2.5 METRE FLEXIBLE.

**3** Electric

6.8kW 400/50/3 FUSED AT 3 x 16amps MACHINE SUPPLIED WITH 2.5 METRES OF 3p/h CABLE.

**CONFIGURABLE TO:**

4.7kW 230/50/1 FUSED @ 25amps or  
2.7kW 230/50/1 FUSED @ 1 x 13amp  
ELECTRICS FOR ROI ARE THROUGH DISHWASHER.

**Notes**

APPROX WEIGHTS:  
EMPTY: 50kg's WITH WATER: 72kg's  
\*+40mm

**PLOT SCALE: 1:10**

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED