

# Scotsman

### Modular Ice Machine up to 210 kg

Item #:
Project:
Quantity:



#### **FEATURES**

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.

Head

NW 507



NW 507 Dice 10 g W 22 x D 22 x H 22 mm



NW H 507 Half Dice 6 g W 10 x D 22 x H 28 mm



NW L 507 Large Dice 15 g W 28 x D 22 x H 28 mm CONDENSING **SYSTEM** 

Air cooled

**REFRIGERANT GAS** 

R290

**VOLTAGE** V/Hz/ph

230/50/1

#### LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation

**RECOMMENDED BINS** 

**SB193** 

SB322

SB393

SB530

**Bins** 

CBT30EMCD

CBT30EMCD

CBTxxxxxxxxxx : need additional bin top

#### ications:



#### **OPERATING REQUIREMENTS**

	Minimum	Maximum			
Air temperature	10°C	43°C			
Water temperature	5°C	38°C			
Water pressure	1 bar (14 psi)	5 bar (70 psi)			
Electrical voltage	-10%	+10%			

MPORTANT NOTICE:

and specifications are s ithout notice. c sheet is meant for com ose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store

www.scotsman-ice.it www.scotsman-ice.com kg

129

168

181


243





## Modular Ice Machine up to 210 kg

Item #: Project: Quantity:

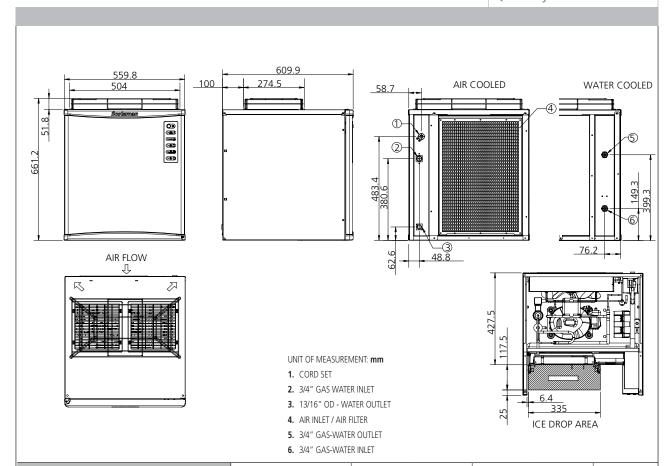

### **UNIT DATA**

Size (W x D x H) 558 x 610 x 609 mm

Net weight 67 kg

		Compressor		Circuit wires		Max. fuse size	
Version	Voltage	Btu/h	W	No.	Ømm²	Α	
NW 507 AS	230/50/1	10035	2941	3	1.5	16	
NW H 507 AS	230/50/1	10035	2941	3	1.5	16	
NW L 507 AS	230/50/1	10035	2941	3	1.5	16	

#### SHIPPING DATA

Carton (W x D x H) 620 x 680 x 800 mm

Weight 77 kg

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 507 AS	Air	230/50/1	210	199	145	14.5	21.1	10.7	1210
NW H 507 AS	Air	230/50/1	201	192	141	14.3	20.2	10.0	1210
NW L 507 AS	Air	230/50/1	203	194	143	13.9	19.9	10.5	1210

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions