DISHWASHER X-51

Multi-phase dishwasher. 500x500mm. racks. Max. loading height: 330mm.







SALES DESCRIPTION

Commercial multi-phase, multi-power dishwasher with 3 wash cycles, wash and rinse temperature display and thermal cycle delay option. For washing glasses, cups, cutlery and small plates.

- ✓ Best performance.
- Optimal washing results.
- Sturdy and reliable.
- √ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- √ Full optional list.







Multi-phase dishwasher:

- √ 230V / 50Hz / 1~ (standard)
- √ 400V / 50Hz / 3N~
- √ 230V / 50Hz / 3~
- ✓ Intuitive use.
- √ Top and bottom wash arms.
- √ Highly efficient, 1HP wash pump.
- Catering grade stainless steel construction (AISI 304 2B).
- Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- Rounded finish interior ensures no accumulation of dirt.
- Completely rounded, stainless steel wire rack support and
- Electronic, watertight control panel with wash and rinse temperature display.
- √ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing performance.
- Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- √ Independent rinse boiler complete with adjustable and safety thermostats.
- Tank equipped with adjustable thermostat.
- √ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- √ 100% tested.

INCLUDES

√ Rinse aid pump.

√ 1 open basket.

- ✓ Detergent dosing equipment.
- 1 plate basket.
- √ 1 small cutlery basket.

ACCESSORIES

- Version with drain pump and non-return valve available.
- Stand.
- ☐ High feet kit 140-190mm.
- ☐ Stainless steel top-of-tank filter set.



sammic

www.sammic.co.uk Food Service Equipment Manufacturer Unit 2. Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved

WARE WASHING

sammic

DISHWASHER X-51

Multi-phase dishwasher. 500x500mm. racks. Max. loading height: 330mm.

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 330 mm Cycle duration: 120 " / 150 " / 210 "

Production baskets/hour: 30 / 24 / 14

Wash temperature: 0 °C - 65 °C

Rinse temperature: 0 °C - 90 °C

- √ Boiler capacity: 10 I
- √ Wash tank capacity: 26 I
- √ Water consumption/cycle: -- I

Loading


- √ Pump: 750 W / 1 Hp
- √ Tank: 2500 W
- ✓ Boiler: 3000/4500 W
- √ Total loading: 3750/5250 W

External dimensions (WxDxH)

- √ Width:600 mm
- ✓ Depth: 630 mm
- √ Height: 835 mm

Net weight: -- Kg

Noise level (1m.): <70 dB(A)

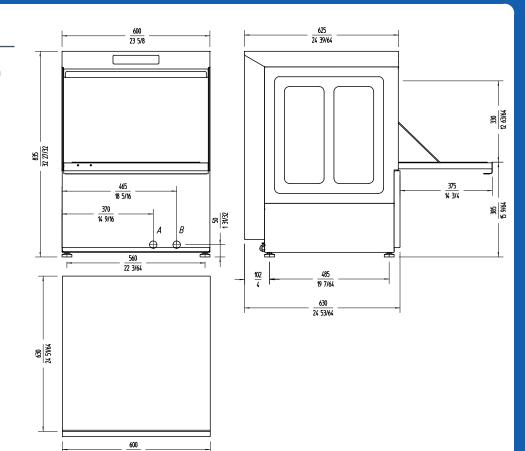

AVAILABLE MODELS

1302094 Dishwasher X-51B 230/50/1 DD (with drain pump)

1302096 Dishwasher X-51D 230/50/1 DD (built-in water softener)

1302098 Dishwasher X-51BD 230/50/1 DD (built-in water softener and drain pump)

* Ask for special versions availability



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved

product sheet updated 01/08/2018