



product sheet updated 01/08/2018



SALES DESCRIPTION

Complete with break tank. WRAS approved.

Suitable for hospitals, clinics, nurseries, laboratories, etc. also making them ideal for glass-washing in the hotel & leisure industry. For washing all type of plates, glasses, cups and cutlery.

- ✓ Best performance.
- Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Wash and rinse temperature display.
- ✓ Full optional list.

 Sammic ware washers are designed for easy and fast on-site maintenance. 100% tested.

FEATURES AND BENEFITS

 \checkmark Constant temperature rinse water system: guaranteed sterilization of all ware to NSF specificaions.

✓ Independent break tank.

 \checkmark Rinse booster pump (minimum water pressure: 0,7bar; 7l/ min).

- Intuitive use.
- ✓ Top and bottom wash arms.
- ✓ Highly efficient, 1HP wash pump.
- ✓ Catering grade stainless steel construction (AISI 304 2B).

 \checkmark Double skinned door equipped with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.

- \checkmark Rounded finish interior ensures no accumulation of dirt.
- \checkmark Completely rounded, stainless steel wire rack support and guide.

 \checkmark Electronic, watertight control panel with wash and rinse temperature display.

 \checkmark Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing performance.

 \checkmark Rinsing dispersers offer clean design. Assembly without screws.

 \checkmark Double filter system provides effective wash pump protection.

 \checkmark Easily removable dispersers and filters for cleaning and maintenance. No tools needed.

 \checkmark Independent rinse boiler complete with adjustable and safety thermostats.

✓ Tank equipped with adjustable thermostat.

 \checkmark Designed for quick and easy maintenance. Fast access to components for on-site maintenance.

✓ 100% tested.

INCLUDES

- ✓ Type A Air Break.
- ✓ Rinse aid pump.
- ✓ 1 open basket.
 ✓ 1 plate basket
- ✓ Detergent dosing equipment.
- ✓ 1 plate basket.
- g equipment. 🚽 🗸 1 small cutlery basket.

ACCESSORIES

- Model with drain pump and non-return valve.
- Stainless steel top-of-tank
- filter set.
- Stand.
- High feet kit.





www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	



DISHWASHER X-61

Commercial dishwasher with constant rinse temperature system

Specifications

Basket dimensions: 500 mm x 500 mm Maximum glass height: 330 mm Cycle duration: 120 " / 150 " / 180 " Production baskets/hour: 30 / 24 / 20 Wash temperature: 65 °C Rinse temperature: 90 °C ✓ Boiler capacity: 12 l ✓ Wash tank capacity: 16 l

√ Water consumption/cycle: 3.5 I

Loading

✓ Pump: 750 W / 1 Hp

- √ Tank: 2500 W
- ✓ Boiler: 6000 W
- ✓ Total loading: 6750 W

External dimensions (WxDxH)

✓ Width:600 mm

✓ Depth: 630 mm


✓ Height: 835 mm

Net weight: 63 Kg

Noise level (1m.): <70 dB(A)

Crated dimensions

640 x 695 x 960 mm

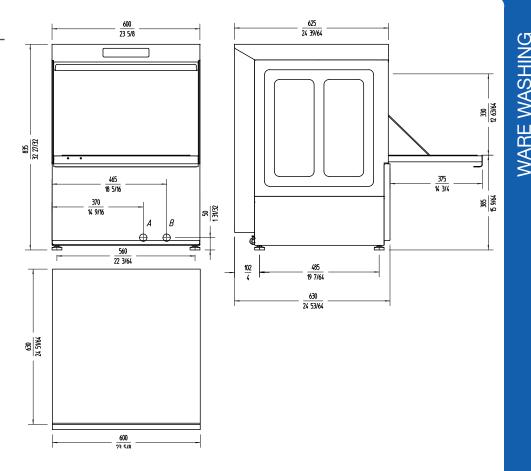

AVAILABLE MODELS

1302155 Dishwasher X-61B 400/50/3 DD (with drain pump)

1302154 Dishwasher X-61 400/50/3 DD

* Ask for special versions availability



Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester uksales@sammic.com

www.sammic.co.uk

Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet updated 01/08/2018

VINER(