

Other models in this range:  
 MV 306 - MV426 - MV430  
 MV456 - MV606  
 MV806 - MV1006

## MV Cube Ice Machines up to 220 Kg







MV460 with SB393 (sold separately)



### Features

- "Global Standard" width - 30" (76.20 cm) wide
- Auto-Alert indicator lights - communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- Front-facing Evaporator - Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- Embedded antimicrobial - Ag-Ion® antimicrobial is present in selected food-zone components
- External Components - All external panel components are crafted for optimal aesthetic appeal through superior fit and finish
- Reusable air filter is easily removable from the outside for ease of cleaning (in air-cooled models).
- California Energy Commission- meets or exceeds CEC guidelines.
- R290 gas charge not exceeding 150 grams, in compliance with European Laws.

### MV460 Technologies



	 +C° -C°	24h		 Water Purity System		 D W H [WxDxH mm] 768x620x573		
		21°: 10°C	32°: 21°C	[kg]	[lbs]		N°	N°*
MV 460 AS		205	451	20500	150	331	15000	[WxDxH inches] 30 3/16" x 24 7/16" x 22 9/16"
MVHL 460 AS		205	451	20500	150	331	25000	



This product qualifies for the following listings:



**2** Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Models and specifications are subject to change without notice.

Other models in this range:  
 MV 306 - MV426 - MV430  
 MV456 - MV606  
 MV806 - MV1006

## MV Cube Ice Machines up to 220 Kg

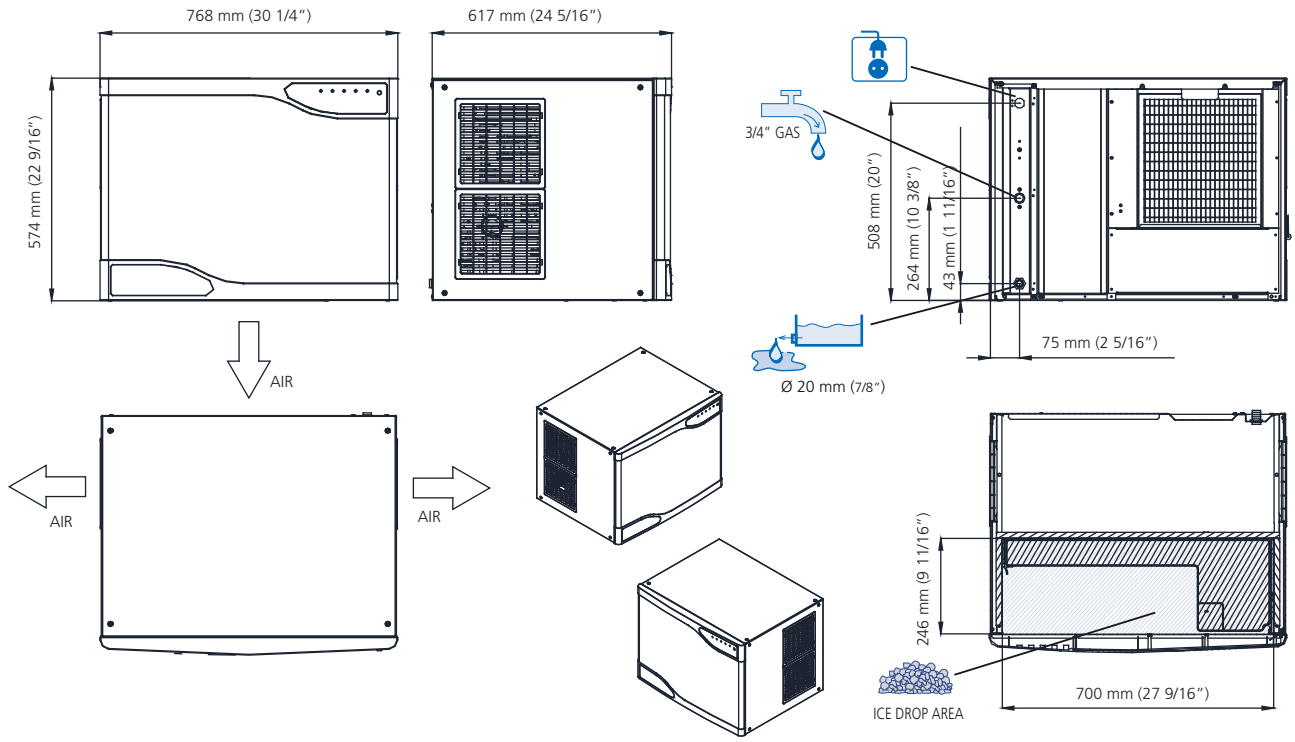

### MV460 AIR COOLED

°C	°F	50°	60°	70°	90°	kg
		10°	15°	21°	32°	
10°	50°	220	214	200	172	kg
50°	120°	485	472	441	379	lbs
21°	70°	205	200	186	163	kg
70°	158°	451	441	410	359	lbs
32°	90°	160	155	150	131	kg
90°	194°	353	342	331	289	lbs
38°	100°	136	133	129	116	kg
100°	212°	299	293	284	257	lbs

24h

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Refrigerant	Capacity	Dimensions	Power	FUSE	Energy	Water	Ice	Weight
	[+C° / -C°]	[Btu/h] [W]	[Ømm²]	[W]		[kWh] - 100 Kg	[l/h]	[kg] [lbs]	[kg] [lbs]
MV 460 AS	R404A	9702 2843	3x1,5	1100	16 A	13,8	12 3,2	68 150	80 176
MVHL 460 AS	R404A	9702 2843	3x1,5	1100	16 A	13,8	12 3,2	68 150	80 176

**IMPORTANT NOTICE:**  
 Models and specifications are subject to change without notice.  
 This spec sheet is meant for commercial purpose only.  
 For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)